

Product : FS-60CP/FCT-65D/FC-76DP & FU reducer


■FU Reducer Specifications

	60CP FU Reducer 0.65X	65D FU Reducer 0.65X	65D FU Reducer 0.65X
Optical Type	4 Elements in 4 Groups (1 Fluorite Element)	4 Elements in 4 Groups (1 Fluorite Element)	4 Elements in 4 Groups (1 Fluorite Element)
OTA	FS-60CP	FCT-65D	FC-76DP
Maximum Tube Diameter x Total Length (mm)	Ø 74x137	Ø 74x136	Ø 74x128
OTA Side Connecting Thread ※4	M64x0.75 Male		
Camera Side Connecting Thread	M52x0.75 Male		
Focal Length (mm)	230	260	365
Aperture Ratio	1:3.8	1:4.0	1:4.8
Image Circle	Ø44	Ø44	Ø44
Mass (kg) ※5	0.41	0.41	0.40
Mass with OTA (kg)	Around 1.9	Around 2.1	Around 2.4


※4 Please note each FU reducer is designed for specific model only, the optical performance will be significantly degraded if attached to the wrong model.

※5 Total Mass include FU reducer body and CA ring, but exclude Camera Angle Adjuster S (CAAs).

- FS-60CP + 60CP FU Reducer 0.65X

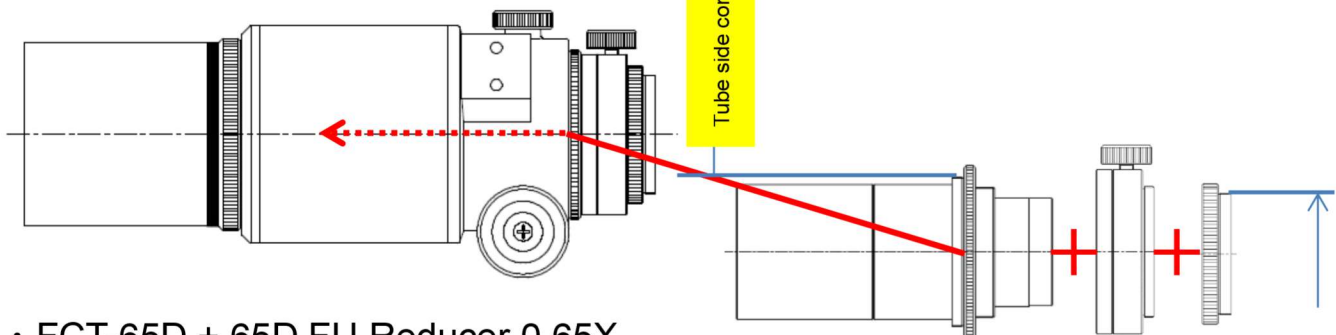


- FCT-65D + 65D FU Reducer 0.65X

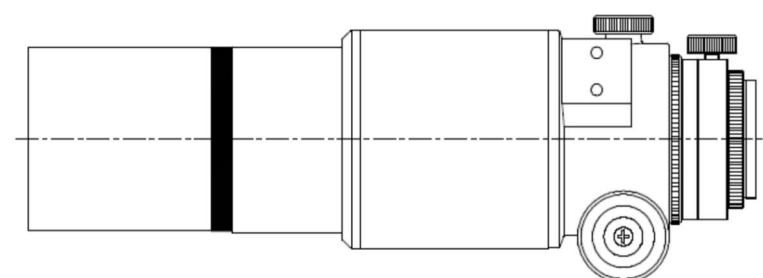

※4 Each dedicated **Common to all**

- FC-76DP + 76DP FU Reducer 0.64X

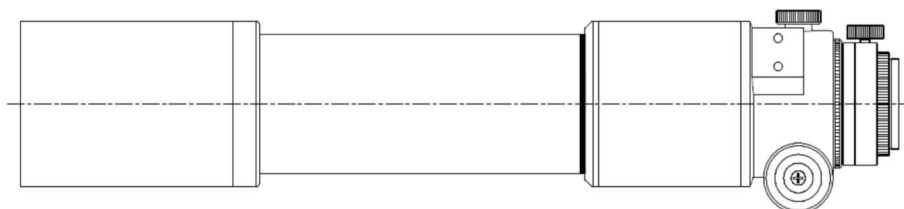

Camera side connection